


Tron® Time-Delay Fuses

FNQ

**13/32" x 1-1/2" Midget
500 Volt, 1/10-30 Amps**



- Fibre tube.
- Albaloy-plated brass endcaps.
- For motor control transformers and other circuits with in-rush currents.

CATALOG SYMBOL: FNQ (5AG)
 TIME-DELAY
 1/10 TO 30 AMPERES
 500 VOLTS AC (OR LESS)†
 INTERRUPTING RATING—10,000A
 UL LISTED, STD 248-14, (GUIDE # JDYX, FILE # E19180)
 CSA CERTIFIED (CLASS 1422-01; FILE 53787)
 † 1-30A rated 250 VDC and 10 KAIC.

Catalog Symbol and Ampere Ratings


FNQ-1/10	FNQ-8/10	FNQ-3-2/10	FNQ-9
FNQ-1/8	FNQ-1	FNQ-3-1/2	FNQ-10
FNQ-15/100	FNQ-1-1/8	FNQ-4	FNQ-12
FNQ-3/16	FNQ-1-1/4	FNQ-4-1/2	FNQ-14
FNQ-2/10	FNQ-1-1/2	FNQ-5	FNQ-15
FNQ-1/4	FNQ-1-6/10	FNQ-5-6/10	FNQ-20
FNQ-3/10	FNQ-2	FNQ-6	FNQ-25
FNQ-4/10	FNQ-2-1/4	FNQ-6-1/4	FNQ-30
FNQ-1/2	FNQ-2-1/2	FNQ-7	—
FNQ-6/10	FNQ-3	FNQ-8	—

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1-30	10	.180	.082

* Weight per carton.

Time-Current Characteristic Curve—Average Melt

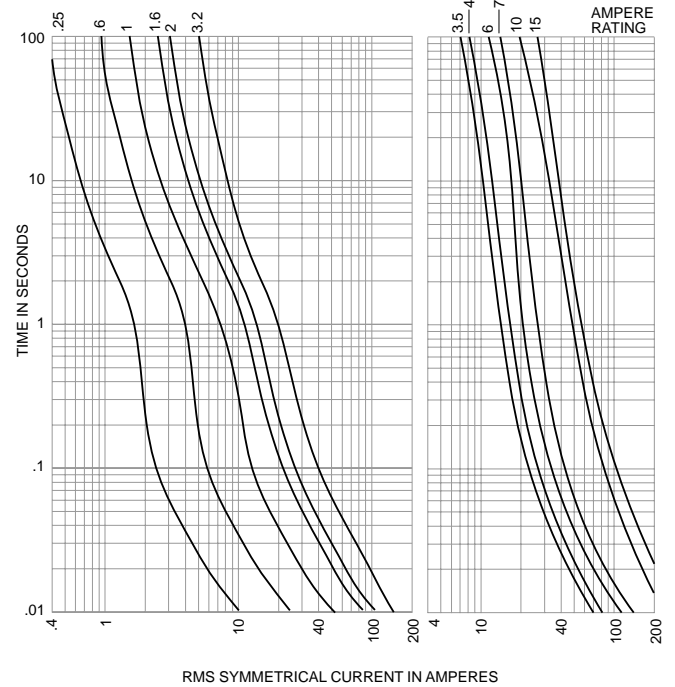

Fuseblock Catalog Numbers

Poles	Terminal Type		
	Screw With Quick Connect	Pressure Plate w/Quick Connect	Box Lug
1	BM6031SQ	BM6031PQ	BM6031B
2	BM6032SQ	BM6032PQ	BM6032B
3	BM6033SQ	BM6033PQ	BM6033B

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.