


In-Line Fuseholder

For Type SFE and 1/4" x Various Length Fuses

HR and HM Series



Dimensional Data: All dimensions (±0.015)

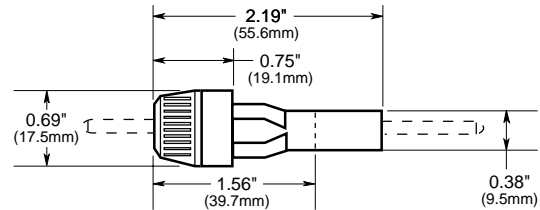

Catalog Symbols: HRJ, HRI, HRH, HRE, HRG, HRF, HMJ, HMI, HMH, HME, HMG, HMF
 In-Line Fuseholders
 Ampere Rating: 20 Amperes
 Voltage Rating: 32 Volts AC
 Temperature Rating (RTI): 140°C
 Agency Approvals:
 No agency listing.

General Information:

- Bayonet type knob.
- Maximum current rating 20 amps; voltage rating 32 volts AC.
- Holders available as complete assembly consisting of in-line holder with 8" or 14" of #14 insulated wire and installed fuses.
- Replacement springs – BK/1A1853.
- Replacement contacts – 9838 for #18 - #22 wire.
 9841 for #12 - #16 wire.

Catalog Symbol	Amps	Volts AC	Includes Fuse	Wire
HRJ*	20	32	SFE-20	19" of #14
HRI			SFE-14	
HRH			SFE-9	
HRE			SFE-7 1/2	
HRG			SFE-6	
HRF			SFE-4	
HMJ**			SFE-20	8" of #14
HMI			SFE-14	
HMH			SFE-9	
HME			SFE-7 1/2	
HMG	SFE-6			
HMF	SFE-4			

*Also available as in-line fuseholder only with lead wire contacts, HRJ-Less-Fuse.

**Also available as in-line fuseholder only with lead wire contacts, HMJ-Less-Fuse.

HDJ-A – For 1/4" x 1 1/4" fuse, no wire or fuse included, accepts #18 - #20 wire.
 HDJ-B – For 1/4" x 1 1/4" fuse, no wire or fuse included, accepts #12 - #16 wire.
 HDI-A – For 1/4" x 7/8" fuse, no wire or fuse included, accepts #18 - #20 wire.
 HDI-B – For 1/4" x 7/8" fuse, no wire or fuse included, accepts #12 - #16 wire.
 HAF-A – For 1/4" x 5/8" fuse, no wire or fuse included, accepts #18 - #20 wire.

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.