

# Dura-Lag

# DLS-R

## Dual-Element Time-Delay Construction Grade Fuses Class RK5 – 600 Volt, 1/10-600 Amps




CATALOG SYMBOL: DLS-R (600V)  
 CURRENT LIMITING  
 DUAL-ELEMENT, TIME-DELAY—10 SECONDS (MINIMUM)  
 AT 500% RATED CURRENT  
 ELECTRICAL RATING: 600 VOLTS AC (OR LESS)  
 SELF CERTIFIED FOR DC, UNDER UL 198L  
 300V DC  
 INTERRUPTING RATING: 200,000A RMS SYMMETRICAL  
 20,000A DC  
 U.L. LISTED—CLASS RK-5  
 (GUIDE # 198E, FILE # E4273)  
 CSA C22.2 NO. 106-HRCI-R

**Catalog Numbers**

DLS-R-1	DLS-R-9	DLS-R-90
DLS-R-1-6/10	DLS-R-10	DLS-R-100
DLS-R-2	DLS-R-12	DLS-R-110
DLS-R-2-1/2	DLS-R-15	DLS-R-125
DLS-R-3	DLS-R-17-1/2	DLS-R-150
DLS-R-3-1/2	DLS-R-20	DLS-R-175
DLS-R-4	DLS-R-25	DLS-R-200
DLS-R-5	DLS-R-30	DLS-R-225
DLS-R-6	DLS-R-35	DLS-R-250
DLS-R-6-1/4	DLS-R-40	DLS-R-300
DLS-R-7	DLS-R-45	DLS-R-350
DLS-R-8	DLS-R-50	DLS-R-400
	DLS-R-60	DLS-R-500
	DLS-R-70	DLS-R-600
	DLS-R-80	

**Dimensional Data**

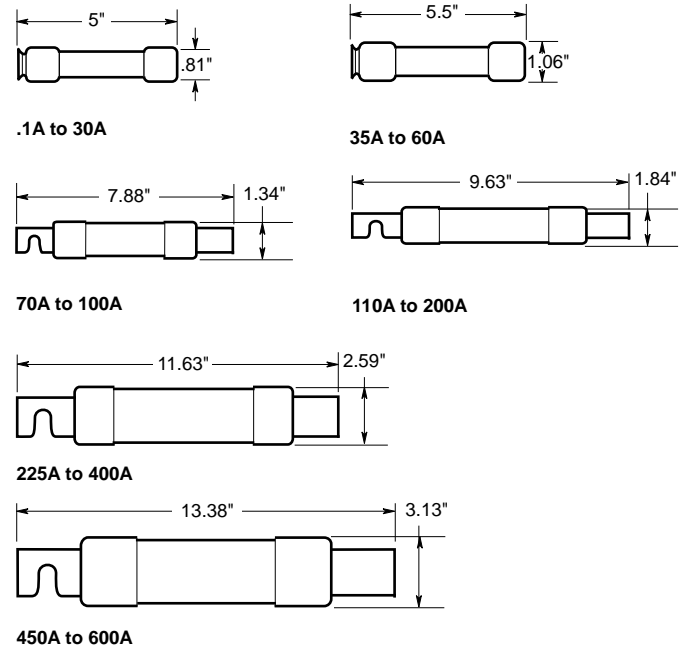

- Designed for contractor needs.
- Protects industrial equipment and large motors.
- Recommended for AC power distribution system mains, feeders and branch circuits.
- Industry standard time delay of 10 seconds at 5 times the fuse rating.

**\*Carton Quantity and Weight—DLS-R (600 Volts AC)**

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1/10-30	10	1.62	0.729
35-60	10	3.00	1.35
70-100	5	3.00	1.35
110-200	1	1.41	0.635
225-400	1	3.13	1.409
450-600	1	5.28	2.376



\*Weight per carton.

# Dura-Lag

# DLS-R

## Dual-Element Time-Delay Constructin Grade Fuses Class RK5 – 600 Volt, 1/10-600 Amps

Time-Current Characteristic Curves–Average Melt

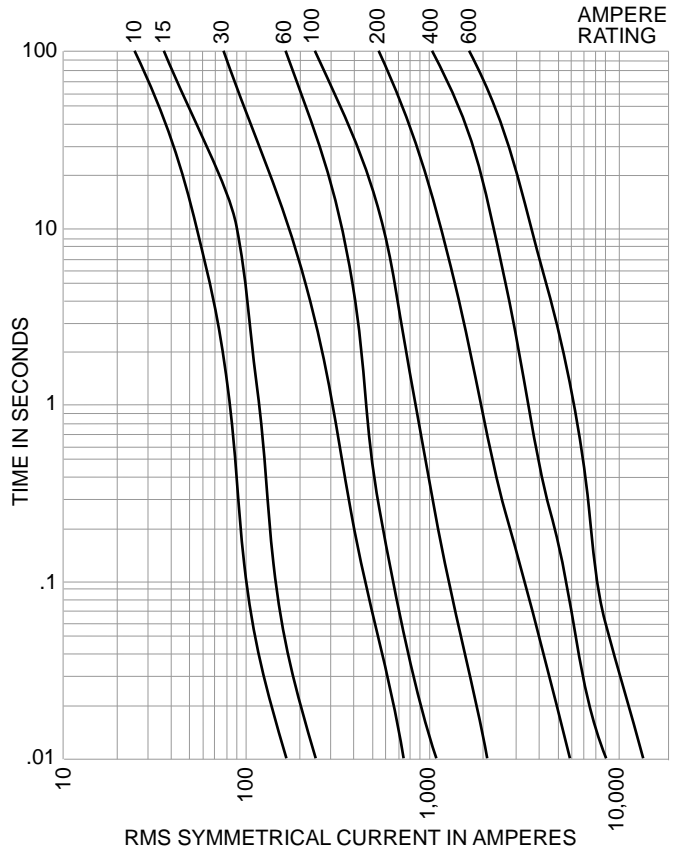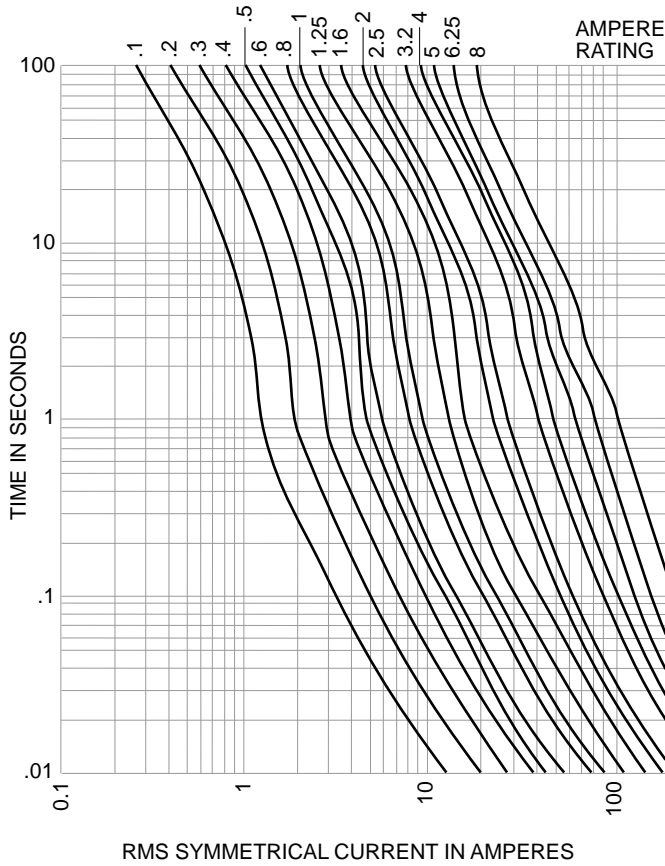

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.