



# Limiter

## Very Fast-Acting

**ANN**

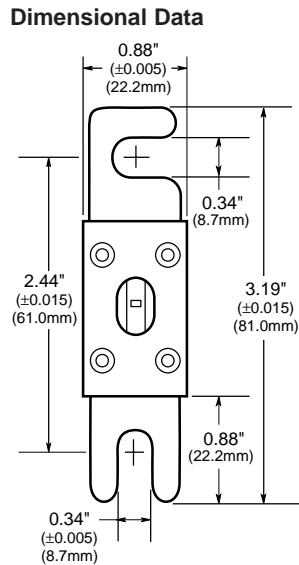

**Time-Current Characteristic Curves—Average Melt**

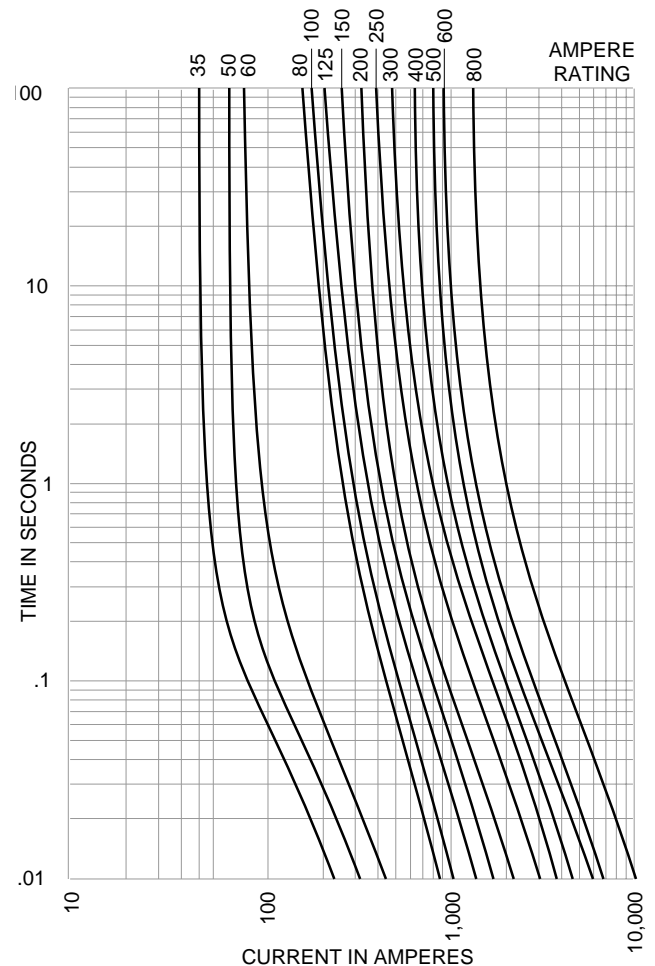

CATALOG SYMBOL: ANN  
 VERY FAST-ACTING  
 125 Volts AC  
 10 TO 800 AMPERES  
 U.L. RECOGNIZED 35-400 Amps  
 (GUIDE # JFHR2, FILE # E56412)  
 INTERRUPTING RATING: 2500 AIC

**Electrical Ratings (Catalog Symbol and Amperes)**


125 Volts AC, IR 2500A @ 125V			
ANN-10	ANN-90	ANN-225	ANN-400
ANN-35	ANN-100	ANN-250	ANN-500
ANN-40	ANN-125	ANN-275	ANN-600
ANN-50	ANN-150	ANN-300	ANN-700
ANN-60	ANN-175	ANN-325	ANN-800
ANN-80	ANN-200	ANN-350	—

**Type ANN**

Very Fast-Acting

- Very fast-acting (high speed of responses to short-circuit currents).
- An open link element is visible thru a mica window.
- Stud mounts in Buss fuseblock 4164.

**FUSE BLOCK No. 4164**

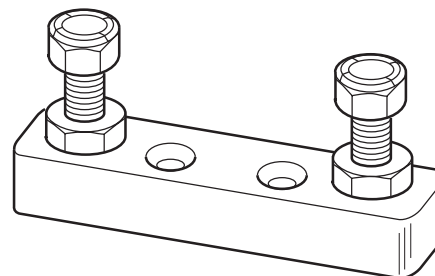

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.