

# Fast-Acting Glass Fuses


## For 1/4" x 5/8" (6.4mm x 15.9mm)

# AGA

# AGA-V



### Dimensional Data

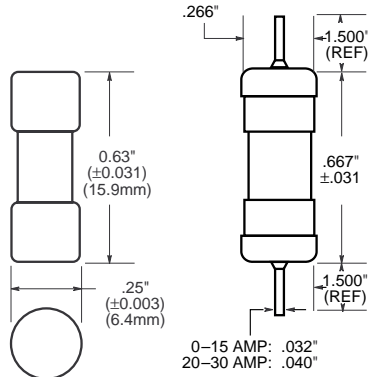

CATALOG SYMBOL: AGA  
 1/4" x 5/8" (6.4mm x 15.9mm) - (1AG)  
 FAST-ACTING  
 AGENCY APPROVALS: STD. 248-14  
 0-5A-UL LISTED (GUIDE # JDYX, FILE # E19180)  
 5.1-12A UL LISTED (GUIDE # JDYX2, FILE # E19180)  
 BODY MATERIAL: GLASS  
 FERRULE MATERIAL: BRASS  
 FERRULE PLATING: ALBALOY


- Formerly 1AG.
- For electronic and small appliance circuits.
- Mounts in Buss in-line holders, HRK or 1/4" clips.

### Packaging & Ordering Information:

	<b>AGA</b>	<b>V</b>	<b>(See Table)</b>
<b>Package Code</b>	<b>Product Symbol</b>	<b>Lead</b>	<b>Rated Current</b>
Blank 5 in		Blank -no lead	
BK/ 100 in		V-Axial lead	

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

### Time-Current Characteristic Curves—Average Melt (Full Size Curves Available)

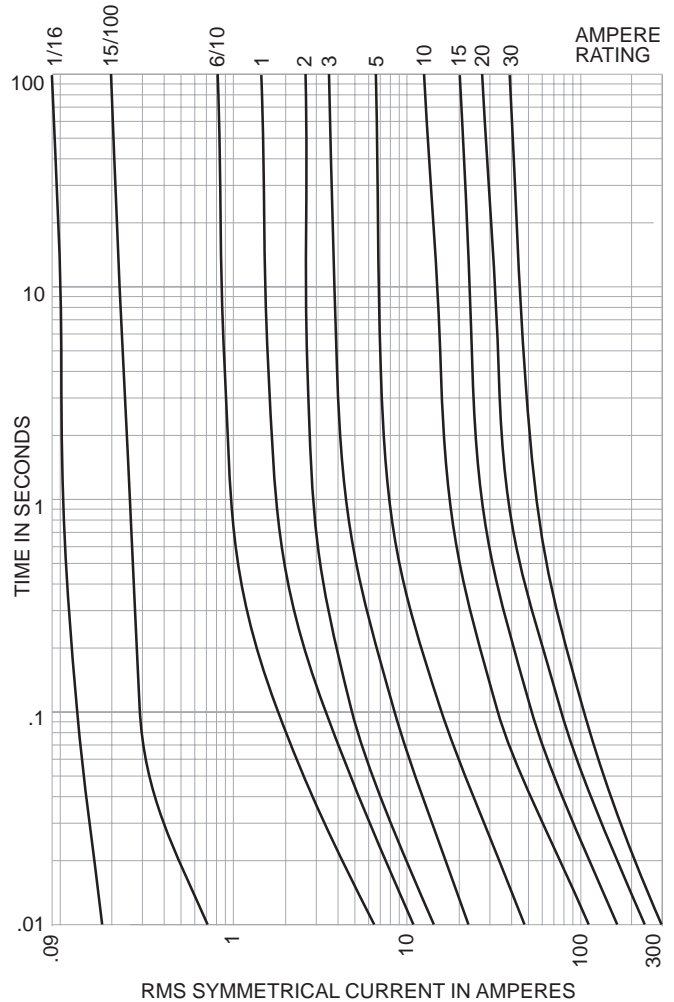

### Electrical Ratings (Catalog Symbol and Amperes)

125 Volts AC		32 Volts AC	
AGA-1/16	AGA-6/10	AGA-2	AGA-7-1/2
AGA-1/10	AGA-3/4	AGA-2-1/2	AGA-10
AGA-1/8	AGA-1	AGA-3	AGA-15
AGA-1/4	AGA-1-1/2	AGA-5	AGA-20
AGA-3/8	—	AGA-6	AGA-25
AGA-1/2	—	AGA-7	AGA-30

### Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
0-12	100	0.73	331

\*Weight per carton.

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

