



KAC 600V 1-1000A

For new installations, Bussmann recommends the 700 volt FWP series fuse. The 600V fuses are supplied as replacements only.

Type	Ordering Information			Dimensions	
	Part Number	Carton Qty.	Carton Weight (lbs)	Figure Number	
KAC 600V	KAC-1 KAC-7 KAC-17.5	10	0.50	Fig. 1	
	KAC-2 KAC-8 KAC-20				
	KAC-3 KAC-9 KAC-25				
	KAC-4 KAC-10 KAC-30				
	KAC-5 KAC-12				
	KAC-6 KAC-15				
	KAC-35 KAC-45 KAC-60	5	1.56	Fig. 2	
	KAC-40 KAC-50				
	KAC-70 KAC-90	1	0.78	Fig. 1	
	KAC-80 KAC-100				
KAC-110 KAC-150 KAC-200					
KAC-125 KAC-175					
KAC-225 KAC-300 KAC-400	1	1.92	Fig. 1		
KAC-250 KAC-350					
KAC-450 KAC-600 KAC-800					
KAC-500 KAC-700	1	3.16	Fig. 1		
KAC-1000					
			6.24		

- Interrupting rating 200kA RMS Symmetrical. 1 kg = 2.2 lbs 1 lb = 0.45 kg
- Consult Bussmann for DC ratings.
- See accessories on page 20.

Dimensions

Fig. 1: 1-30 & 450-1000 Amp Range


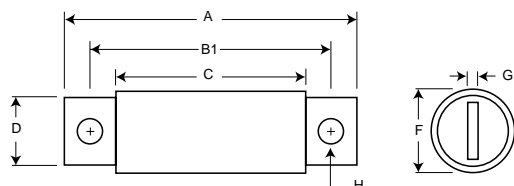


Fig. 2: 35-400 Amp Range

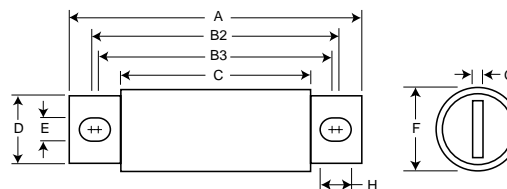

Order #	Fig.	A	B1	B2	B3	C	D	E	F	G	H
KAC-1-30	1	2.875	2.500	—	—	1.875	0.406	—	0.563	0.063	0.257
KAC-35-60	2	4.375	—	3.750	3.500	2.750	0.625	0.343	0.813	0.094	0.468
KAC-70-100	2	5.000	—	4.063	3.656	2.750	0.750	0.406	1.000	0.125	0.609
KAC-110-200	2	5.140	—	4.390	3.766	2.906	1.000	0.406	1.500	0.250	0.718
KAC-225-400	2	6.182	—	4.815	4.565	3.000	1.625	0.562	2.000	0.250	0.687
KAC-450-800	1	6.250	4.750	—	—	3.063	2.000	—	2.500	0.250	0.563
KAC-1000	1	7.250	4.750	—	—	3.063	2.750	—	3.500	0.375	0.563

Dimension in inches.
1mm = 0.0394" 1" = 25.4mm

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.